

JXiQ™ ASME COMPLIANT  
GAS POOL & SPA HEATER

Jandy®



# THE **SMARTEST** WAY TO HEAT YOUR COMMERCIAL POOL AND SPA



OFFICIAL  
POOL  
EQUIPMENT  
SUPPLIER



**JXiQ™**  
GAS HEATER



## The JXiQ™ ASME Compliant Gas Pool & Spa Heater for Commercial use takes the guess work out of pool heating making it easy to use, install and service.

Built with the brawn to withstand the high-use demands of commercial properties, ASME compliant JXiQ heaters are ultra-compact and constructed with bronze headers and thicker-walled copper fin tubes.

### Commercial Grade Models

Small but strong enough to handle the rigors of non-residential use, ASME compliant JXiQ heaters feature burly bronze headers and 30%<sup>1</sup> thicker-walled, robust copper or cupronickel heat exchanger tubes and corrosion-resistant bronze headers to meet the high stresses of commercial installations

<sup>1</sup>30% thicker than other models.

### Energy-Efficient Heating

84% thermal efficiency rating<sup>2</sup> and low-NO<sub>x</sub> design surpasses strict DOE Energy Efficiency requirements

<sup>2</sup>84% Thermal Efficiency applies to All Models except 260K BTU Natural Gas model with Cupronickel heat exchanger which is 83%, see table for complete model listing.

- Low Gas Pressure Sensor**  
 Ensures there's enough gas pressure to safely ignite
- Optimize Flow**  
 Measures temperature rise between the inlet and outlet to optimize flow and avoid heat exchanger failures
- Auto-Sensing Power Input**  
 Automatically adjusts to supplied power when installed — no cards to flip and no wires to change
- Largest Display in the Industry**  
 Digital display is 50% larger than before and capable of showing 80 characters
- Best Drop-In Option**  
 Plumbing flexibility for quick MasterTemp® and Max-E Therm® replacement that requires no plumbing adjustments
- Flexible Installation. Easy Servicing.**  
 Top easily removed and rotated 180 degrees for increased accessibility; includes flip up electrical panel
- Keeps Critters Out**  
 No more chewed up wires. The JXiQ is made with a fully enclosed shell to protect against rodent intrusion and damage
- Ultra-Compact Lightweight Design**  
 Fits on a 2' x 2' pad and is 38% lighter with a 28% smaller footprint\*


\*Compared to popular competitor models.

## ASME® Compliant JXiQ Heaters

Part No.	Firing Rate	Gas Type	Heat Exchanger	Thermal Efficiency	Weight	Vent Diameter*	Min. GPM	Max. GPM
JXiQ260NC	260K BTU	Natural Gas	Copper	84%	163 lbs.	7" (18 cm)	30	100
JXiQ260PC	260K BTU	Propane	Copper	84%	163 lbs.	7" (18 cm)	30	100
JXiQ400NC	400K BTU	Natural Gas	Copper	84%	168 lbs.	8" (20 cm)	30	100
JXiQ400PC	400K BTU	Propane	Copper	84%	168 lbs.	8" (20 cm)	30	100
JXiQ260NS	260K BTU	Natural Gas	Cupronickel	83%	163 lbs.	7" (18 cm)	30	100
JXiQ260PS	260K BTU	Propane	Cupronickel	84%	163 lbs.	7" (18 cm)	30	100
JXiQ400NS	400K BTU	Natural Gas	Cupronickel	84%	168 lbs.	8" (20 cm)	30	100
JXiQ400PS	400K BTU	Propane	Cupronickel	84%	168 lbs.	8" (20 cm)	30	100

\*Minimum vent pipe size for Category I installations.

## DIMENSIONS

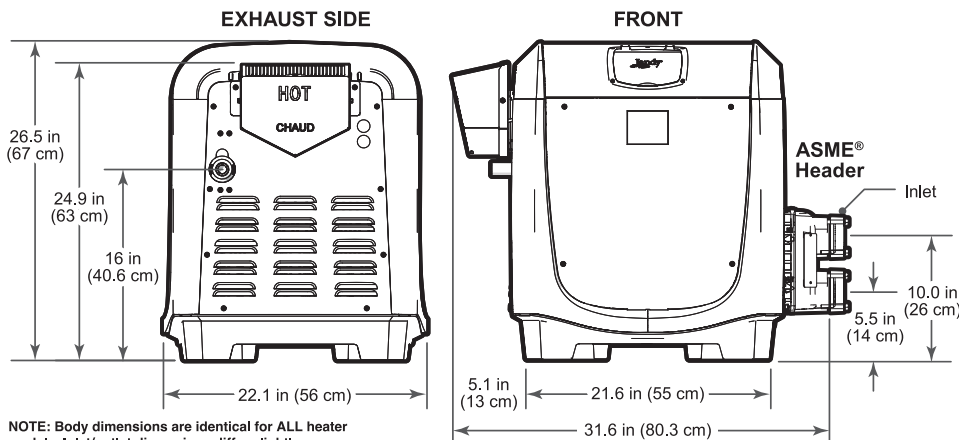

NOTE: Body dimensions are identical for ALL heater models. Inlet/outlet dimensions differ slightly.



1-Year Commercial limited Warranty

A Fluidra Brand | Jandy.com | 1.800.822.7933

TRADE SERIES EXCLUSIVE



87644\_SL